


Ex-Leuchte Typ 509
II 2G EEx de IIC T3-T4

IP65




AUSFÜHRUNGEN:
-25°C ≤ t_a ≤ +60°C

Spannung Eingang	Leuchtmittel	Temperaturklasse	Schutzklasse	Gewicht (kg)	Bestell-Nr.
12 V DC	HALOSPOT 70 (8° Punkt) 20 W HALOSPOT 70 (24° Flut) 20 W HALOSPOT 70 (8° Punkt) 50 W HALOSPOT 70 (24° Flut) 50 W	T4 T4 T3 T3	III	3,50	AZ-509 HAL208P AZ-509 HAL2024F AZ-509 HAL508P AZ-509 HAL5024F
230 V / 50 HZ	HALOPAR 20 (10° Punkt) 50 W HALOPAR 20 (30° Flut) 50 W	T3 T3	I	3,50	AZ-509 HAL5010P AZ-509 HAL5030F

Ex-Leuchte Typ 510
II 3GD Ex nA II T4 T 78°C

IP65

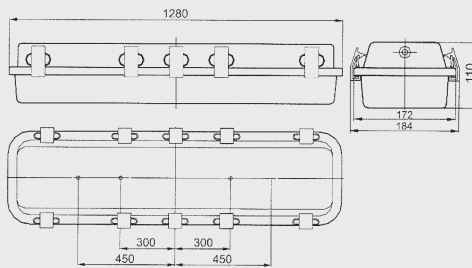

AUSFÜHRUNGEN:
-20°C ≤ t_a ≤ +60°C

Spannung Eingang	Leuchtmittel	Gewicht (kg)	Bestell-Nr.
230 V / 50HZ	2 x L 36 W	6,50	AZ-510 L236 nt
	1 x L 36 W	6,00	AZ-510 L136 nt
	3 x L 36 W	7,00	AZ-510 L336 nt

– weitere Ausführungen und Zubehör auf Anfrage / Änderungen und Irrtum vorbehalten –