




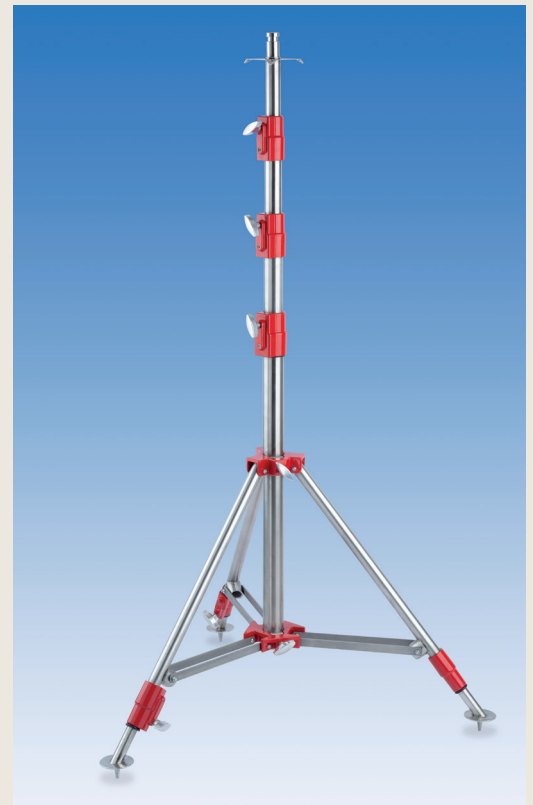


ELSPRO TRIPOD FIRE DEPARTMENT Type IFW 2.0

FEATURES AND QUALITIES:

- is according to DIN 14682 („Tall tripod - Collapsible with fixed pivot pin“) and thus maintains the room dimensions of max. 20 cm when stored
- stainless steel construction aisi 304 - no corrosion
- downpipes Ø 50/45/40/35 mm, thickness 1.5 mm for stability and longevity
- 3 blocking systems of aluminum with clamping
- supporting legs can be individually extended up to a maximum of 0.58 m - clamping of supporting legs with blocking system of red aluminium - safe standing by compensating for unevenness on the standing surface
- shock absorber: pneumatic design for air-cushioned lowering - controlled lowering of the tripod load
- equipped with hand protection gap on telescopic parts
- connection end with ø 30 mm DIN pins as per DIN 14640
- supporting legs with ø 80 mm base plates and pins
- fastening set, anchoring set and double cross-bars optional




MODELS:

Type	Frame*							Order-No.
IFW 2.0	SS	114 cm	415 cm	114 cm	160 cm	20.0 kg	15.4 kg	TV7845SA


*Material: **SS** = Stainless steel



When folded the tripod has a length of 114 cm and is held together by the lashing strap delivered with the tripod.

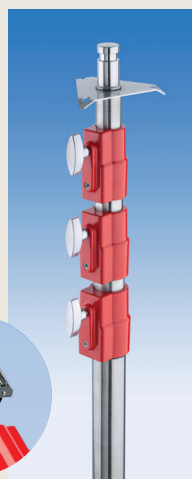

The triangular fastening plate for attaching the carabiner hooks of the guy ropes is attached directly under the DIN pin.

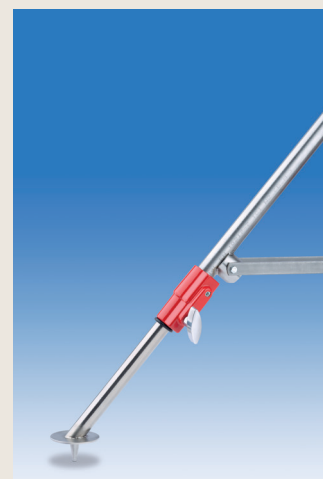

For secure positioning all 3 supporting legs can be leveled individually on the standing surface and any unevenness can be compensated.

– other models on request / subject to modification and errors –

COMPONENTS AND ACCESSORIES

Order-No.




Fastening Set

AS750X3

consisting of each 3 x:

- 7.5 m polyamide – fastening rope Ø 4 mm as per DIN EN ISO 1140, color: white
- 1 carabiner as per DIN 5299–C80
- 1 ring, high-gloss galvanized, A 40 x 5, as per DIN 5296
- 1 rope thimble as per DIN 6899
- 2 wire rope clamps, oval
- 1 adjustment element, galvanized, for adjusting the rope length

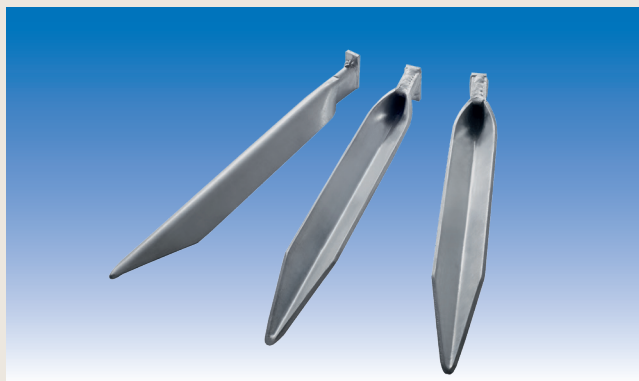


Ground Anchoring Set

EA400

3 x ground anchors:

- 400 mm long, hot-dip galvanized

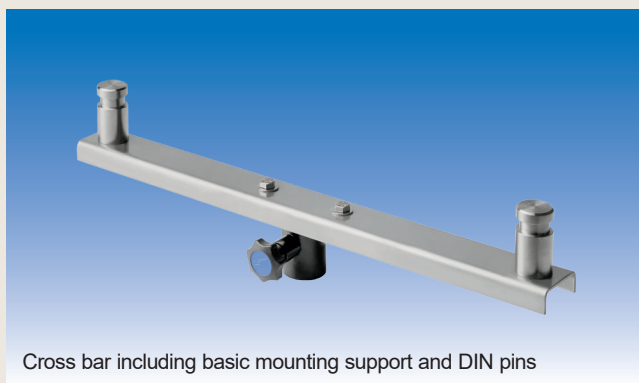

Cross bar including basic mounting support and DIN pins

Double Cross Bars

bestehend aus:

- basic mounting bracket/support including star grip for attaching to the tripod
- 2 x stainless steel DIN pins ø 30 mm
- 1 x stainless steel C-profile rail
 - Length 450 mm **TV045**
 - Length 600 mm **TV060**

– other models on request / subject to modification and errors –