



MODEL:

Solid rubber plug with earthing contact 3 pol. / 16 A / 230 V / black-blue

- complying with the standard DIN 49440/441
- with metric screw connection
- impact-resistant
- IP54 - splashproof
- for a cable diameter 6 - 14 mm
- flexible connection cross-section 3G1,0 / 3G2,5 mm²
- screwless quick locking system
- external strain relief

Order No.

SCH11/PG/BL/N



Solid rubber connector with earthing contact 3 pol. / 16 A / 230 V

- complying with the standard DIN 49440/441
- with metric screw connection
- with self-closing hinged lid
- impact-resistant
- IP54 - splashproof
- for a cable diameter 6 - 14 mm
- flexible connection cross-section 3G1,0 / 3G2,5 mm²
- screwless quick locking system
- external strain relief


SCH21/K/PG/BL/N



optional with LED

- optional with integrated voltage indicator (green LED lamp) (see small picture)

SCH21/K/PG/BL/LED

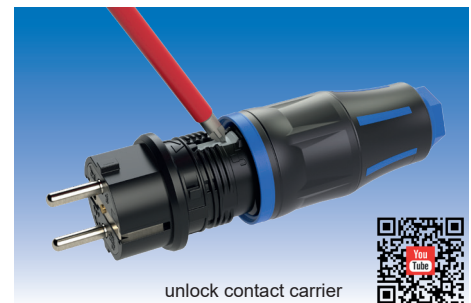

unlock contact carrier

Solid rubber tripple connector with earthing contact 3 pol. / 16 A / 230 V

- complying with the standard DIN 49440/441
- with metric screw connection
- with self-closing hinged lids
- with integrated voltage indicator (green LED lamp)
- impact-resistant
- IP44 - splashproof
- with separate connection compartment
- for a cable diameter 6-19 mm
- flexible connection cross-section 3G1,5 / 3G2,5 mm²
- screwless, centric strain relief
- customized models: equipped with flexible INDUSTRIEFLEX® 07 HT cable

SCH31/P



- with solid rubber earthed plug and 5 m INDUSTRIEFLEX® 07 HT 3G1,5 mm²
- with solid rubber earthed plug and 10 m INDUSTRIEFLEX® 07 HT 3G1,5 mm²
- with solid rubber earthed plug and 20 m INDUSTRIEFLEX® 07 HT 3G1,5 mm²

S5KD

S10KD

S20KD



– other models on request / subject to modification and errors –