


SPACEJET 48 110°/ SPACEJET 48 60°

ELSPRO LED Floodlight

CE IP66 



VERSIONS:

Voltage	Output	Lumen	R _a	Beam angle	Dimensions	Weight	Order No.
100 - 240 V AC 50 / 60 Hz	max. 48 W	6,700	≥ 80	110°	L: 240 mm W: 267 mm H: 210 mm (Including bracket)	4.2 kg	ESJ048110
		6,100	≥ 80	60°			ESJ048060



SPECIAL FEATURES:

- ❶ **110° version:** High-performance LED module with 228 nodes evenly distributed on a large area and a 110° beam angle produces a homogeneous light pattern
 - Perfect for providing even illumination of areas
- ❷ **60° version:** 24 high-performance LEDs with supplementary lenses and a 60° beam angle produces a focused light pattern
 - For providing focused illumination of areas from a great height
- Colour temperature: 5,000 K
 - Daylight white
- Ambient temperature: **-30 °C to +55 °C**
 - Can be used indoors and outdoors, even under large temperature fluctuations
- Ingress protection type: **IP66**
 - Proof against dust entry and protected against for powerful water jets
- Connection is by a flexible cable (approx. 50 cm) with jacketed ends
- Mains adapter and driver are fitted in an extra housing on the bracket for easy mounting
 - No negative interactions due to heating up
- The low weight of only 4.2 kg and strong mounting bracket allows for easy and reliable ceiling or wall mounting An additional safety wire with karabiner hook is included
 - Double protection - double safety

– Other versions on request / subject to changes, E&OE –


SPACEJET 48 110°/ SPACEJET 48 60°

ELSPRO LED Floodlight







CE IP66  

Light emission:

SPACEJET 48 - 110°

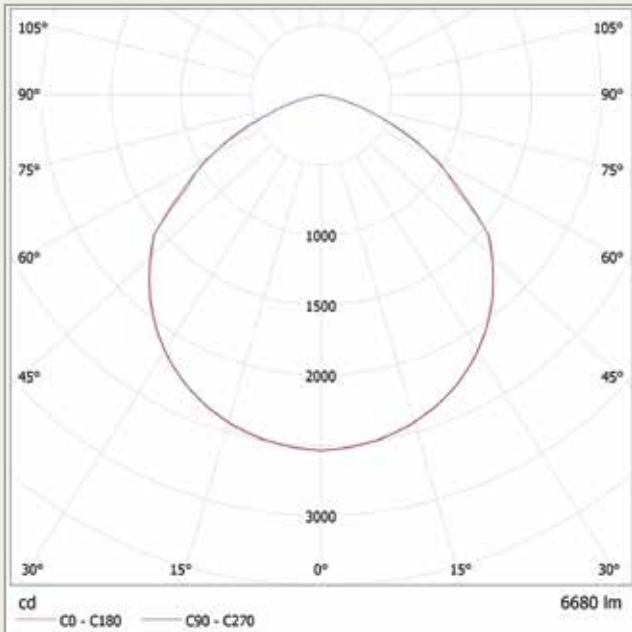

SPACEJET 48 - 60°

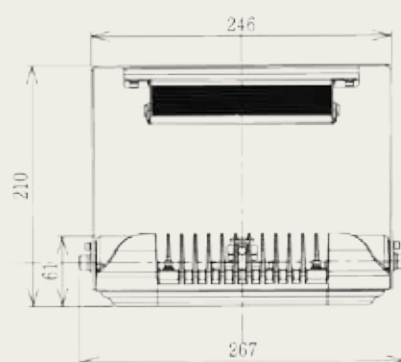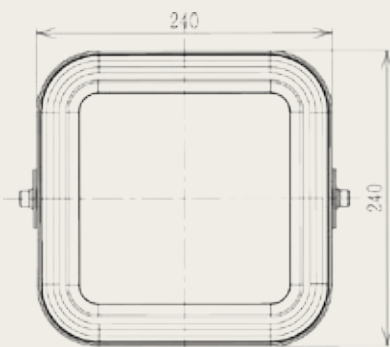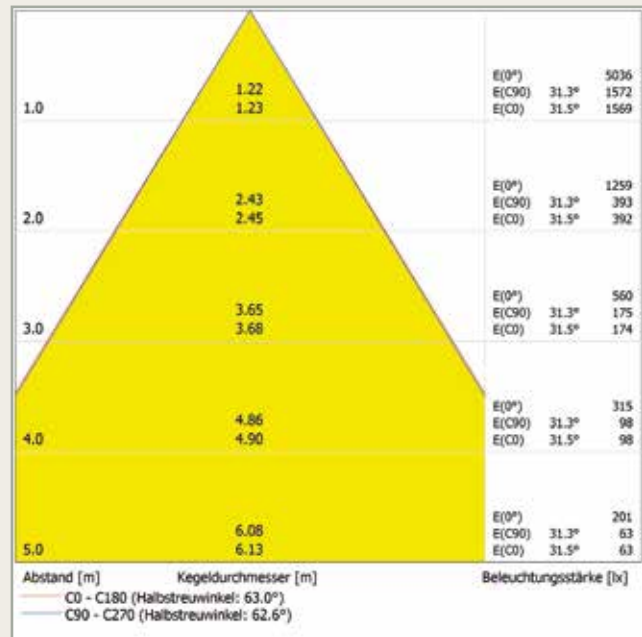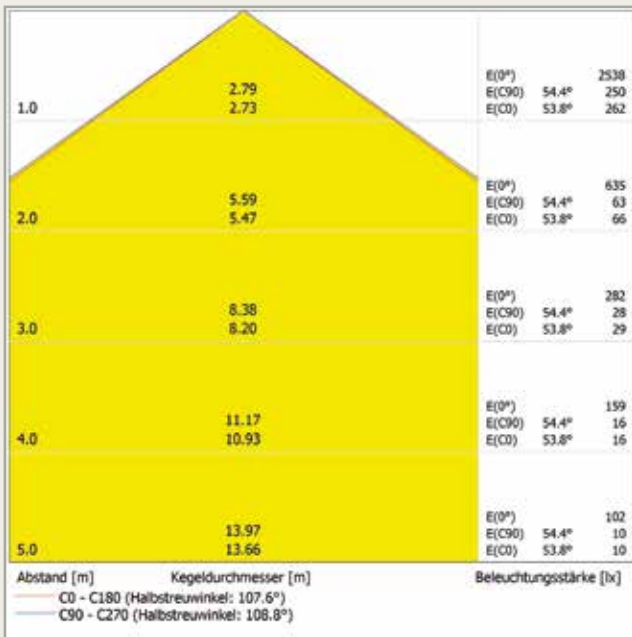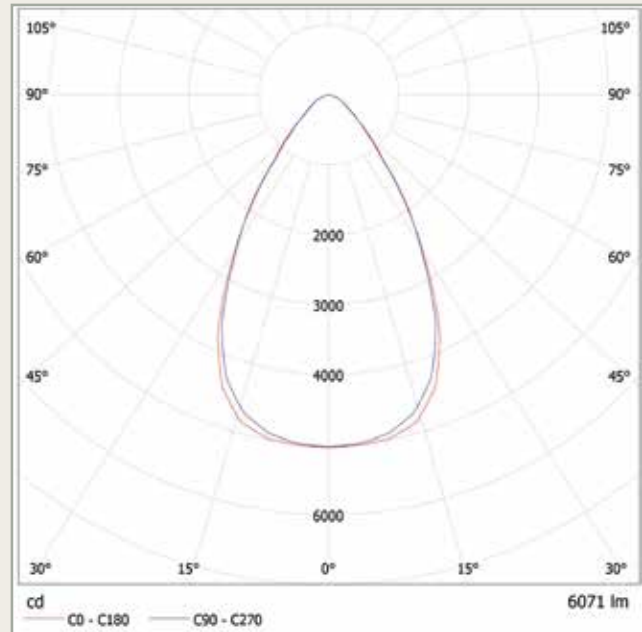

– Other versions on request / subject to changes, E&OE –