


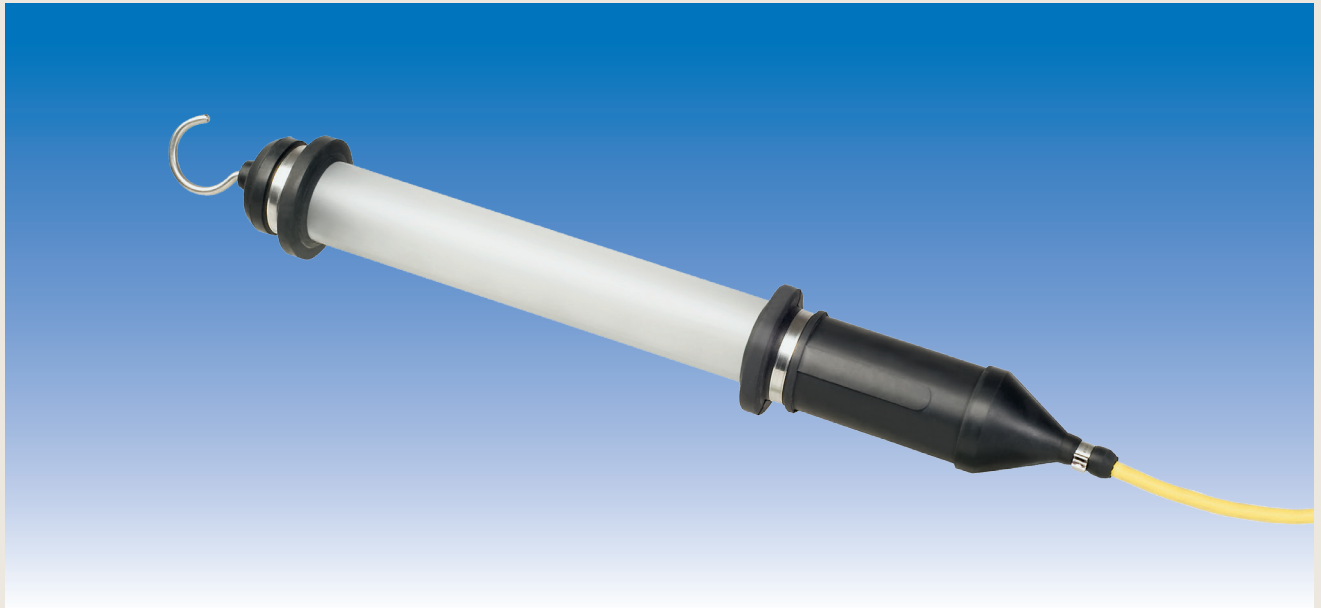

MODELS:

Light Source	Output	Lumen	Length in m	Cable with Plug	Order No. 24 V AC/DC	Order No. 42 V AC/DC	Order No. 42 V AC	Order No. 230 V AC
42 Mid-Power LEDs	15 W	2,835 lm	614 mm	5 m 10 m	QL22415/5 QL22415/10	QL24215/5 QL24215/10	- -	- -
50 Mid-Power LEDs	40 W	4,100 lm	848 mm	5 m 10 m	- -	- -	QL4210/5 QL4210/10	- -
36 Mid-Power LEDs	12 W	2,100 lm	605 mm	5 m 10 m	- -	- -	- -	QL2312G/5 QL2312G/10
60 Mid-Power LEDs	18 W	3,060 lm	800 mm	5 m 10 m	- -	- -	- -	QL2318G/5 QL2318G/10

- Cables in INDUSTRIEFLEX® 07 HT -

SPECIAL FEATURES:

- IP55 – protected against water jets and dust → SAFETY also when used in wet areas
- Colour temperature 24 / 42 V: 5,000 K; 230 V: 6,500 K → similar to daylight
- protective tube of polycarbonate 1,5 mm wall thickness → long service life, even when subjected to mechanical strain
- solid rubber grip and solid rubber end cap with suspension bracket of stainless steel V2A → the lamp lies slip-resistant and secure in the hand, can also be hung up draft-proof
- the MID-POWER LEDs emit a concentrated white wide-area light → ideal for illuminating at close range, e.g., in the case of inspections, repairs and final inspections
- very low heat development → no danger of injury resulting from burns in the case of direct physical proximity or even contact with the lamp
- the LEDs are vibration-resistant and have an expected service life of up to 50,000 hours → sudden total loss of all diodes is virtually excluded. Light does not shut off completely even at the end of service life. This characteristic means a great degree of operating safety
- low energy consumption, means small transformers with low output in the case of operating voltages of 24 V and 42 V → the transformers are light, easy to handle, and cost-effective
- an integrated electronic power supply unit continuously provides the LEDs in DC operation with constant current → this assures an extremely long service life with optimal light output

- other models on request / subject to modification and errors -

FEATURES AND QUALITIES:

- high-quality hard-shell diffusion filter already mounted in the factory
- produces homogeneous light
- simple snap-on mounting on support rail
- filter mounting/dismounting without tools
- conversion of the light to direct lighting by removing the filter



ACCESSORIES:

Order-No.

- 2 pipe clips with rubber sleeves for suspending all tube lamps
- 1 magnet holder with strong gripping force incl. retainer clip galvanised

Q01/2

Q02M/VZ



with hard-shell diffusion filter

- other models on request / subject to modification and errors -