



MODELS:

Voltage input	Power	Lumen	T _a max	Outputs	Dimensions	Weight	Order no.
230 V AC	28 W	3,139 lm	≤+50°C	2P+E	670x155x105 mm	3.4 kg	EXTRA-EX-28
	53 W	6,561 lm			1,280x155x105 mm	5.6 kg	EXTRA-EX-53


- Models with emergency power on request -

SPECIAL FEATURES:


- High-power LED with up to 112 / 124 lm/W.
- Light colour 4,000 K.
- CRI +80
- Power factor 0.98
- Lifetime L80B50 ta30 - up to 60,000 hours
- Ex II 2G Ex eb mb op is IIC T4 Gb
- Ex II 2D Ex tb op is IIIC T67°C Db
- Gas Zone 1
- Dust Zone 21
- Polycarbonate housing and cover
- Direct mounting by means of fixing clamp and self-locking rope suspension, holder for boom, wire suspension or wall mounting angle 45°
- Cable gland M20
- Protection class 1
- IP66
- Ambient temperature: -20°C ≤ T_a ≤ +50°C
- silicone-free
- High light output
- Neutral white (3,000 K / 6,000 K on request)
- High colour rendering index
- Proven longevity
- ATEX certificate FTZÚ 16 ATEX 0167X
- IK10, resistant to mechanical stress (protection against impacts with an impact energy of up to 20 joules)
- Easy installation on the ceiling or wall of the room to be illuminated
- Line diameter of 7-12 mm
- Dust and splash protection
- Use even with large temperature fluctuations
- Free of paint wetting-interfering substances

- Further models on request / subject to change and error -

LIGHT EMISSION:

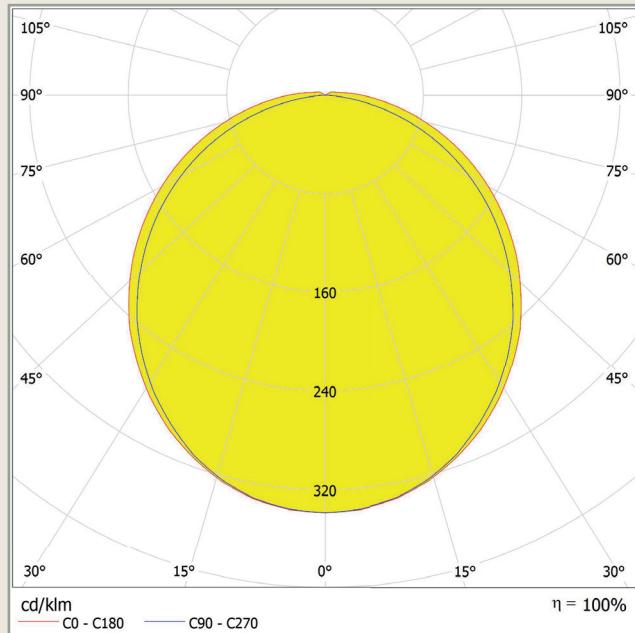

DIMENSIONS:

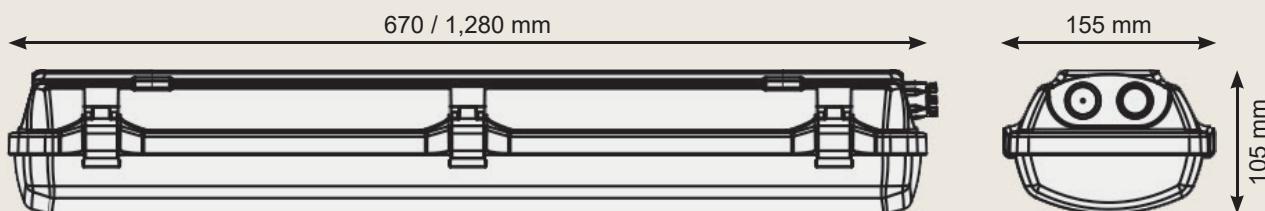

ACCESSORIES:



Wire hanger set (2 pcs)
for chain suspension
(without chain)
EXV005/SET

Set of 45° metal
brackets for wall
mounting (2 pcs.)
EXV006

Self-locking cable
suspension (2 pcs. à
3 m)
EXV007

Clamp set (2 pcs.) for
mounting on a boom
with Ø 50 mm
EXV008/SET

– Further models on request / subject to change and error –