

Ex Tube Light EXTRA-EX-LED - Zone 1, 21



MODELS:

Voltage input	Power	Lumen	T _a max	Models	Outputs	Dimensions	Weight	Order no.
230 V AC	28 W	3,061 lm	≤+50°C	Without power switch	2P+E	1,149 x Ø 70 mm	2.9 kg	AQUA-EX-28-OT
	51 W	5,985 lm				1,709 x Ø 70 mm	4.7 kg	AQUA-EX-51-OT
	28 W	3,061 lm		With power switch		1,149 x Ø 70 mm	2.9 kg	AQUA-EX-28-T
	51 W	5,985 lm				1,709 x Ø 70 mm	4.7 kg	AQUA-EX-51-T

SPECIAL FEATURES:


- High-power LED with 109 / 117 lm/W.
- Light colour 4,000 K.
- CRI +80
- Power factor 0.98
- Lifetime L80B50 ta30 - up to 45,000 hours
- ATEX certificate FTZÚ 16 ATEX 0052X
AQUA-EX-28-OT / AQUA-EX-51-OT
- ATEX certificate FTZÚ 16 ATEX 0052X
AQUA-EX-28-T / AQUA-EX-51-T
- Gas Zone 1
- Dust Zone 21
- Polycarbonate tube with 4 mm wall thickness
- Direct mounting using mounting clamps (not included) or suspension
- Cable gland M20
- Protection class 1
- IP66 / IP 68
- Ambient temperature: -20°C ≤ T_a ≤ +50°C
- High light output
- Neutral white (3,000 K/ 6,000 K on request)
- High colour rendering index
- Proven longevity
- Ex II 2G Ex eb mb op is IIC T4 Gb
- Ex II 2D Ex tb op is IIIC T62°C Db
- Ex II 2G Ex db eb mb op is IIC T4 Gb
- Ex II 2D Ex tb op is IIIC T62°C Db
- IK10, resistant to mechanical stress (protection against impacts with an impact energy of up to 20 joules)
- Easy installation on the ceiling or wall of the room to be illuminated
- Line diameter of 7-13 mm
- dustproof and waterproof
- Use even with large temperature fluctuations

– Further models on request / subject to change and error –


Ex Surface Light
EXTRA-EX-LED - Zone 1, 21



LIGHT EMISSION:

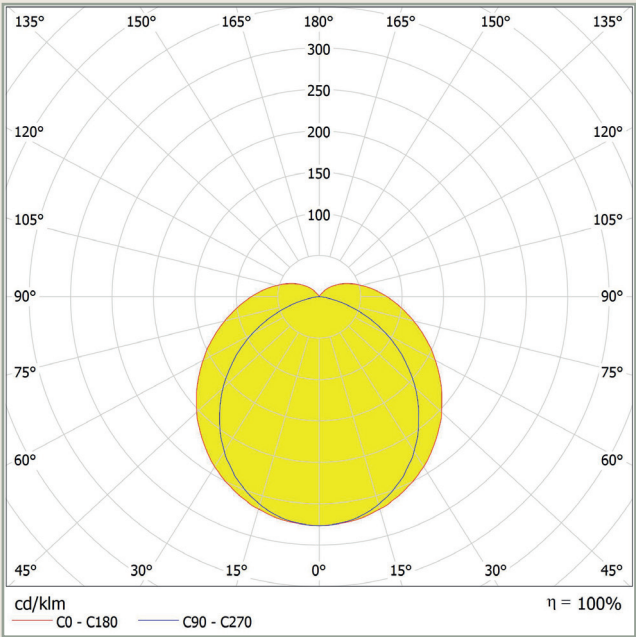

DIMENSIONS:

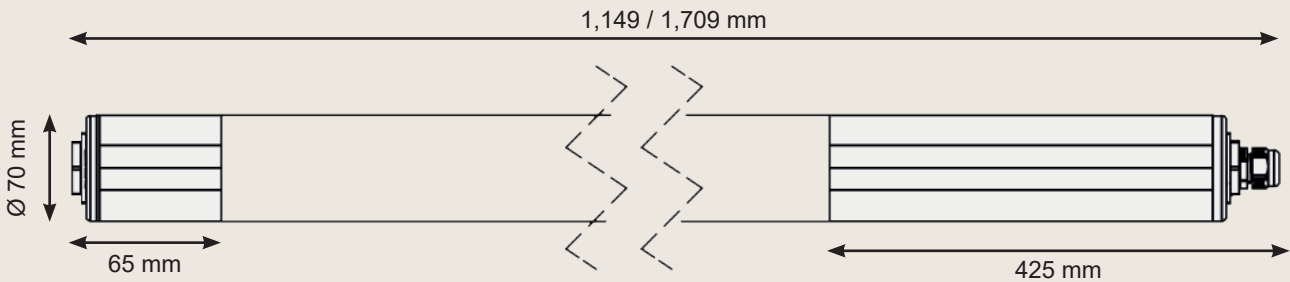

ACCESSORIES:



Mounting clamps
stainless steel (2 pcs.)
EXV009/SET



Mounting clamps
plastic dark grey
(2 pcs.)
EXV010/SET

– Further models on request / subject to change and error –