

Ex Trough Light EXTRA-N-LED - Zone 2, 22



MODELS:

Voltage input	Power	Luminous flux	T _a max	Outputs	Dimensions	Weight	Order no.
230 V AC	8 W	1.171 lm	≤+45°C	2P+E	670x155x105 mm	1,8 kg	EXTRA-N-8-G2
	15 W	2.251 lm	≤+60°C			EXTRA-N-15-G2	
	29 W	4.357 lm	≤+55°C			1,7 kg	EXTRA-N-29-G2-218
	15 W	2.251 lm	≤+60°C		1.280x155x105 mm	3,1 kg	EXTRA-N-15-G2-236
	29 W	4.503 lm				3,2 kg	EXTRA-N-29-G2-236
	58 W	8.715 lm	≤+40°C		1.580x155x105 mm	3,6 kg	EXTRA-N-58-G2
	24 W	3.377 lm	≤+55°C			3,6 kg	EXTRA-N-24-G2
	44 W	6.754 lm				EXTRA-N-44-G2	
	74 W	11.172 lm	≤+45°C			3,8 kg	EXTRA-N-74-G2
	94 W	13.730 lm	≤+40°C				EXTRA-N-94-G2
	115 W	16.311 lm			EXTRA-N-115-G2		

- Dimmable models and those with emergency power on request -

SPECIAL FEATURES:


- High-power LED with 142 / 146 / 150 / 154 / 155 lm/W → High light output
- Light colour 4,000 K. → Neutral white
- CRI +80 → High colour rendering index
- Power factor 0.98
- Lifetime L80B10 TA30 - up to 70,000 hours → Proven longevity
- Ex II 3G Ex nR IIC T6 Gc / Ex II 3D Ex tc IIIC T80°C Dc → ATEX certificate FTZÚ 16 ATEX 0102X
- Gas Zone 2, Dust Zone 22
- Polycarbonate housing → IK10, resistant to mechanical stress (impact protection with impact energies up to 20 joules)
- Direct mounting by means of fixing clamp and self-locking rope suspension, holder for boom, wire suspension or wall mounting angle 45° → Easy installation on the ceiling or wall of the room to be illuminated
- Cable gland M20 → Line diameter of 7-12 mm
- Protection class 1
- IP 66 → Dust and splash protection
- Ambient temperature: -20°C ≤ T_a ≤ see table → Use even with large temperature fluctuations
- silicone-free → Free of paint wetting-interfering substances

- Further models on request / subject to change and error -


Ex Trough Light EXTRA-N-LED - Zone 2, 22



LIGHT EMISSION:

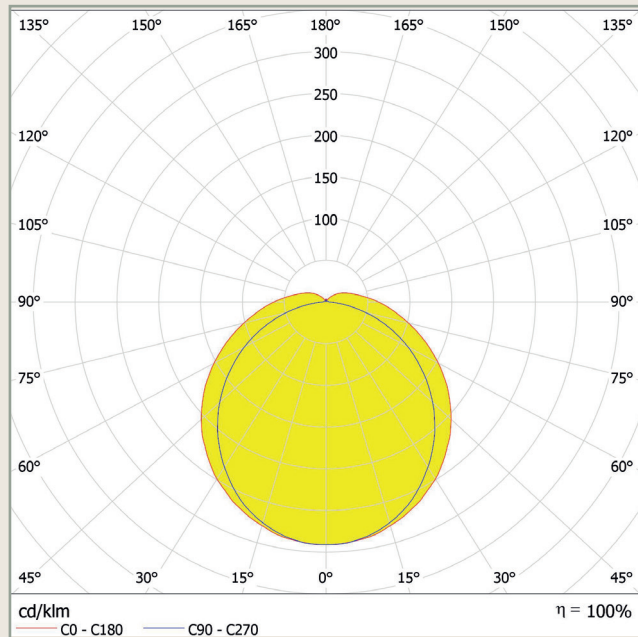

DIMENSIONS:

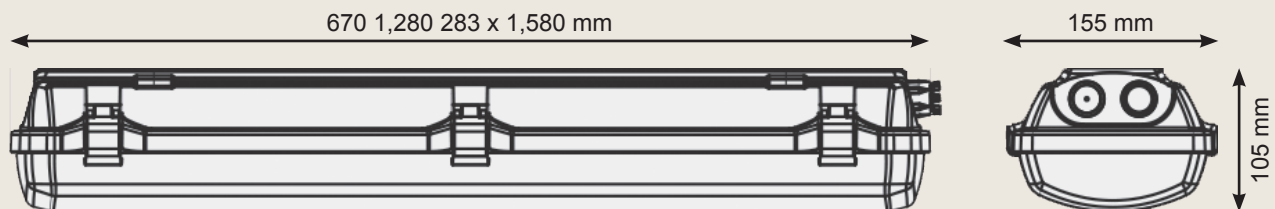

ACCESSORIES:



Wire bracket for chain suspension (without chain)
EXV005



Set of 45° metal brackets for wall mounting (2 pcs.)
EXV006



Self-locking cable suspension (3 m)
EXV007



Clamp for mounting on a boom with Ø 50 mm
EXV008

– Further models on request / subject to change and error –