

The QV LED Battery 60 is a robust high-performance work light for battery or mains operation.

FEATURES AND PROPERTIES:

- Robust powder-coated die-cast aluminium housing with rubberised edge and lens protection
- Small space requirement due to compact design
- Easy to transport thanks to rubberised carrying handle
- Display for charge status (100 - 10%) and light output (6,000 - 1,200 lm) on the back of the light
- 5-level dimming function (6,000 / 4,800 / 3,600 / 2,400 / 1,200 lm)
- Hybrid system: battery or mains operation possible
- integrated proximity sensor detects obstacles and switches the light off automatically → increased safety (Fig. 1)
- integrated power bank function (output 5V 1A) for charging mobile devices - Capacity 6,000 mAh (Fig. 2)
- Protection class IP 67 - dust and waterproof (Fig 3)
- Impact resistance IK 07 - impact-resistant and resistant to mechanical stress
- A continuously adjustable 180° swivelling base allows for a variable alignment of the light beam (Fig. 4)
- Base prepared for mounting the ELSPRO base holder with DIN pin receptacle Ø 30 mm (Order No. TV001/5) for tripod mounting of the light
- 120° beam angle for uniform area illumination
- Low charge warning by flashing
- with brightness memory function
- Fluorescent reflector integrated into the lens makes it easier to find the light in the dark (Fig. 5)
- Supplied including 230 V AC charging unit with 5 m mains cable type H05RN-F (Fig. 6)




Fig. 1



Fig. 2



Fig. 3



Fig. 4




Fig. 5



Fig. 6

CONFIGURATIONS:

| Type | Light source | Luminous flux | Duration of light* | Battery | Charging time | Colour | Dimensions in cm | Weight incl. battery | Order no. |
|-------------------|--------------------|------------------|-------------------------------|-----------------------------|---------------|----------------|---------------------------------|----------------------|---------------|
| QV LED battery 60 | High-Power COB LED | 6.000 - 1.200 lm | 1,0 - 6,0 h depending on mode | Lithium-ion 10,8 V / 6,0 Ah | 3,0 h - 4,0 h | black and blue | H = 21,3 W = 19,4 D = 7,0 | 2.600 g | QVLA60 |

* maximum light duration per battery charge depending on the selected mode

COMPONENTS AND ACCESSORIES:

| | Order no. |
|--|-----------------|
| Magnetic holder (stainless steel holding rail for clamp attachment with 2 holding magnets) for QV LED Battery 60 | QVL.2MAG |
| ELSPRO base mount TV001 incl. DIN pin holder Ø 30 mm with mounting material for QV LED battery 60 | TV001/5 |
| DELTA 8 aluminium tripod with Ø 30 mm DIN pin - height 220 cm* | TV7722SA |
| SUPERGRIP type special holder - robust gripper clamp with Ø 30 mm DIN pin | TV7361 |

* You can find other suitable stands in tab 13 (LIGHT catalogue)

- Other configurations on request / Subject to changes and errors -

The QV LED Akku 20 is a very handy and lightweight high-performance work light for mobile, off-grid use.

FEATURES AND PROPERTIES:

- Robust powder-coated die-cast aluminium housing with rubberised edge and lens protection
- small footprint and easy to transport thanks to lightweight and compact design
- Display for charge status (100 - 20%) and light output (2,000 - 400 lm) on the back of the light
- 5-level dimming function (2,000 / 1,600 / 1,200 / 800 / 400 lm)
- Integrated power bank function (output 5V 1A) for charging mobile devices - Capacity 6,000 mAh (Fig. 1)
- Protection class IP 67 - dust and waterproof
- Impact resistance IK 07 - impact-resistant and resistant to mechanical stress
- 180° swivel base incl. 2 magnets allows variable alignment of the light beam (Fig. 2)
- 7 position locking stand for positioning incl. 1/4" thread for tripod mounting
- 120° beam angle for uniform area illumination
- Low charge warning by flashing
- with brightness memory function
- Fluorescent reflector integrated into the lens makes it easier to find the light in the dark (Fig. 3)
- Delivery includes 230 V AC charging unit



AUSFÜHRUNGEN:

| Type | Light source | Luminous flux | Duration of light* | Battery | Charging time | Colour | Dimensions in cm | Weight incl. battery | Order no. |
|-------------------|--------------------|----------------|--|----------------------------|---------------|----------------|--------------------------------|----------------------|---------------|
| QV LED battery 20 | High-Power-COB LED | 2.000 - 400 lm | 2.5 hours - 15.0 hours depending on the mode | Lithium-ion 7.2 V / 6.0 Ah | 3.0 h - 4.0 h | black and blue | H = 12.1 W = 15.9 D= 4.7 | 950 g | QVLA20 |

* maximum light duration per battery charge depending on the selected mode



Fig. 1



Fig. 2

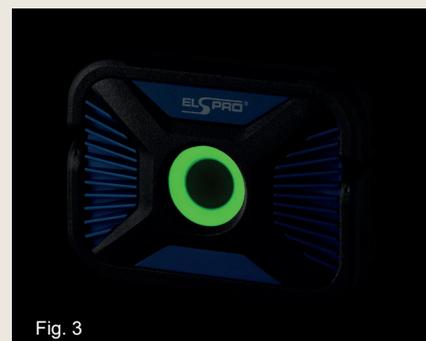


Fig. 3

- Other configurations on request / Subject to changes and errors -